


werkbreedte
largeur de travail
working width
Arbeitsbreite

A	B	C
1750	1880	2910
2000	2130	3160
2200	2330	3360
2500	2630	3660
3000	3130	4160
3300	3430	4460

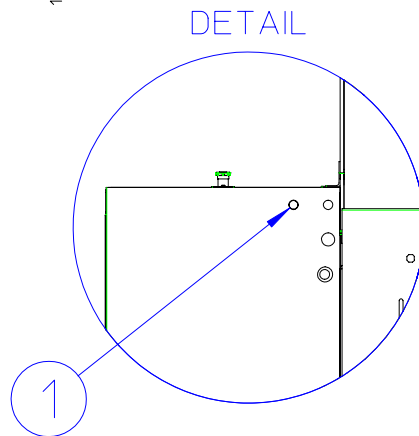

D800 S		052.900.0008A
Rolsnelheid Vitesse repassage	4 – 12m/min *16m/min	Mangelgeschwindigkeit Ironing speed
Rol aandrijfmotor Moteur entrainement	2.2kw – 1500 rpm *4kw – 1500 rpm	Walzenantriebmotor Roll drive motor
Rol afzuigmotor Moteur aspiration	0.75kw – 3000 rpm	Absaugmotor Exhaust motor
Motor hydr. pomp Moter pompe hydr.	0.37kw – 1500 rpm	Motor hydr. Pompe Moter hydr. pump
Stoomdruk Pression de la vapeur	Min.: 6Bar Max.: 12Bar Aanbevolen : 10 Bar Recommandé Empfohlen Recommended	Dampfdruck Steam pressure

1	Elektrische aansluiting Connection électrique Strom Anschluss Electrical connection	230V : 3 x 16mm ² + PE (80A) 400V : 3 x 10mm ² + N + PE (40A)
2	Afzuiging dampen Sortie buées Wrasenausgang Vapour outlet	Ø125
3	Stoominlaat Entrée vapeur Dampfanschluss Steam inlet	5/4" 6–12Bar
4	Stoomuitlaat Sortie vapeur Dampfausgang Steam outlet	3/4"